

TL50 Tower Light

Robust, durable and aesthetic design

- Displays up to 5 colours in a single tower; choice of green, yellow, red, blue or white LED colours
- Extremely long-lasting bright LED technology providing >100.000 hours (11 years) of continuous working life
- Time saving pre-assembled light segments to your own configuration
- Robust IP65-rated watertight and oil tight industrial housings for direct machine mounting
- Superior shock, vibration and impact resistance
- 30 mm threaded base for direct cabinet and panel mounting with a single drilled hole
- Choice of prewired 2 m attaching cable, quick-disconnect M12 or pigtail connectors
- Includes models with audible alert; intensity adjustable up to 95 dB at 1 m
- Large selection of mounting accessories



BANNER[®]

more sensors, more solutions

Banner Engineering Europe
Park Lane, Culliganlaan 2F
1831 Diegem
Belgium
+32 2 456 07 80
www.bannereurope.com

EZ-LIGHT™ TL50
Tower Light

TL50 Tower Light



Audible version available with adjustable intensity up to 95 dB at 1 m



Up to 5 different colour combinations (red, green, yellow, blue and white)

Bright LED colours, 360° visibility at more than 100 m

IP65 housing

2 m cable output or M12 connector with 4, 5 or 8-pin, model-dependant

Other EZ-LIGHTS



K50L and K30L dome lights (50 mm and 30 mm diameter) with a threaded base for easy installation.

Up to 5 colours for K50L (buzzer optional) and 3 colours for K30L in the same device.

Very robust IP69K housing with a hygienic design.



K80L is the perfect solution for wall-mounting and can display up to 5 colours (buzzer optional). It connects with standard M12 connector or with cable gland to an internal terminal chamber.



K80 QUAD: Segmented indicators delivering simultaneous one, two, three or four colour displays.

General-Purpose, M12 connector		
Model (examples)	Number of Colours	Colours
TL50RQ	1	Red
TL50GRQ	2	Green, Red
TL50GYRQ	3	Green, Yellow, Red
TL50BGRQ	4	Blue, Green, Yellow, Red
TL50WBYRQ	5	White, Blue, Green, Yellow, Red

Select your own product


Housing	Colour Position	Audible Alarm	Connection
TL50	1 2 3 4 5	A	Q

R = Red
Y = Yellow
G = Green
B = Blue
W = White

A = Steady pulse
Blank = No alarm
Blank = 2 m Integral cable
Q = Integral M12 QD
QP = M12 pigtail QD

Note: 5 colour models are not available with audible alarm

TURCK HUNGARY Kft.
 Könyves Kálmán Krt. 76.
 H-1087 Budapest
 Tel:36-1-477-0740
 Fax:36-1-477-0741
 Email:turck@turck.hu
 Web:www.turck.hu

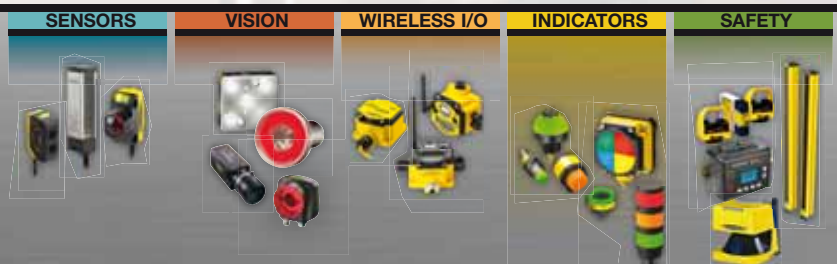

Banner offers a full range of sensing solutions

BANNER ENGINEERING EUROPE
 WWW.BANNEREUROPE.COM

